

EM83 **Helix** Conveyor




New FlexMove **Helix** Conveyor

FlexMove new Helix conveyor is compactly structured solution to elevate products up and down saving precious production space.

FlexMove Helix conveyor is used as buffer conveyor or as bridge to another height allowing passage way below the conveyor. FlexMove Helix conveyor simple, reliable and continuous run conveying solution for wide applications.





The Helix conveyor uses in wide applications handling small items to light to medium packed items or cartons. Aluminium Frame and Structure. Mild Steel Zink Plated Leg support.

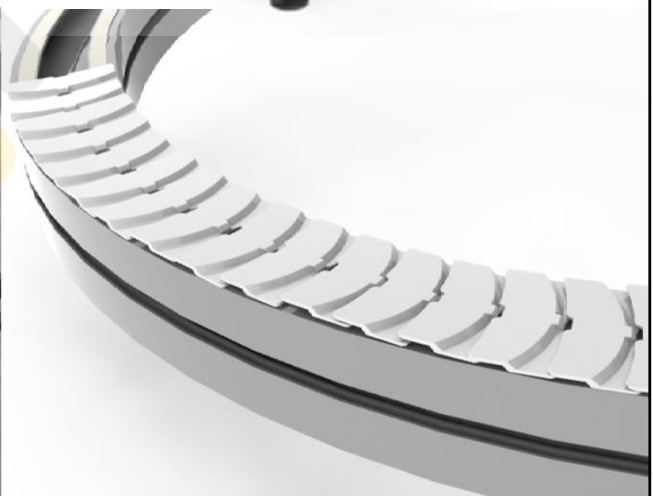

Rev 2


EM83 Helix Conveyor

HX 3-U T3-IF 900-OF 2200-CW R500

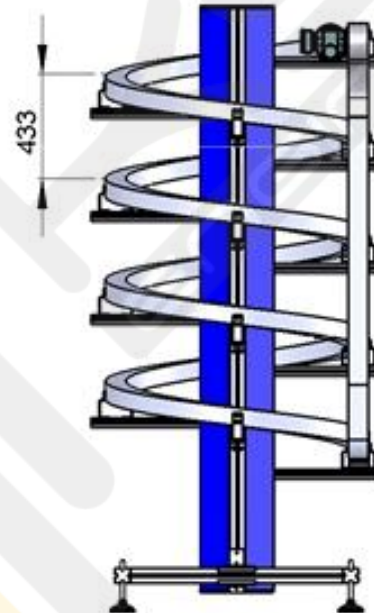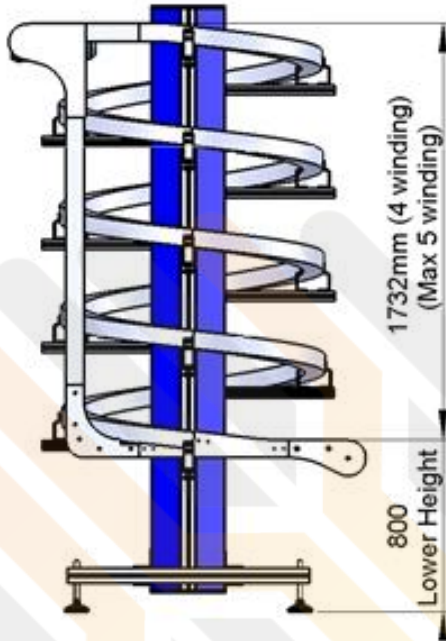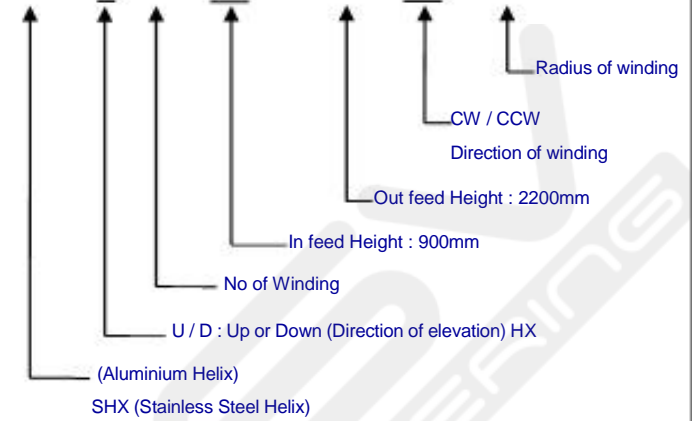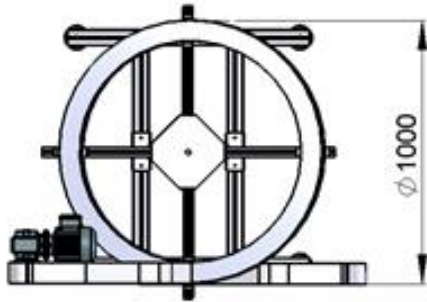


Technical Specifications

- 433mm inclination per winding (7 Degree)
- Max. 5 Winding
- 1000mm center diameter
- Speed 5-30 meter/min
- Lower height 800, 900, 1000mm +/- 50mm
- Max load 5 kg/m
- Max product height 200mm
- Drive and idler are horizontal position at infeed and outfeed
- Chain width 83mm
- Plain and friction top chain
- Special low friction chain

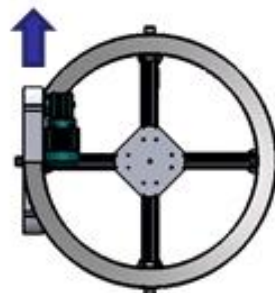

CW Direction of winding

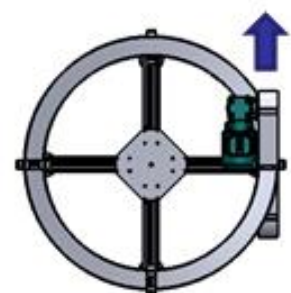

CCW Direction of winding

Rev 2